



****How to repair FOSS tube by the FOSS Pliers:**


1. Preheat the FOSS Pliers for 5 minutes before using.
2. Find the puncture.

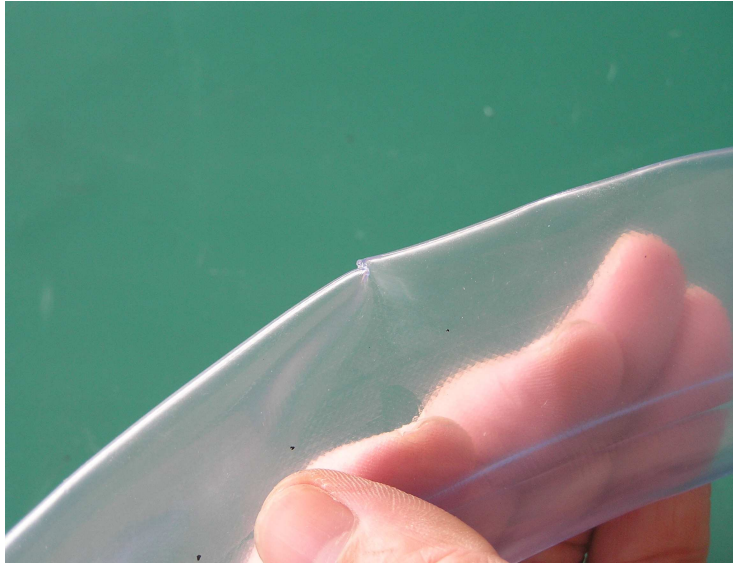

3. Use two seal clips to hold both sides of the puncture tightly, making the puncture flat and no air between two seal clips.

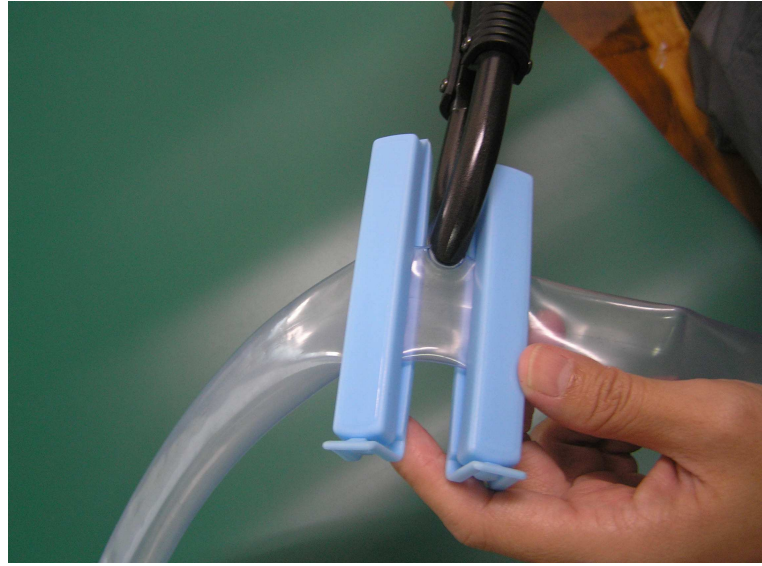

4. Press the puncture with the heated Pliers noses for a few seconds.

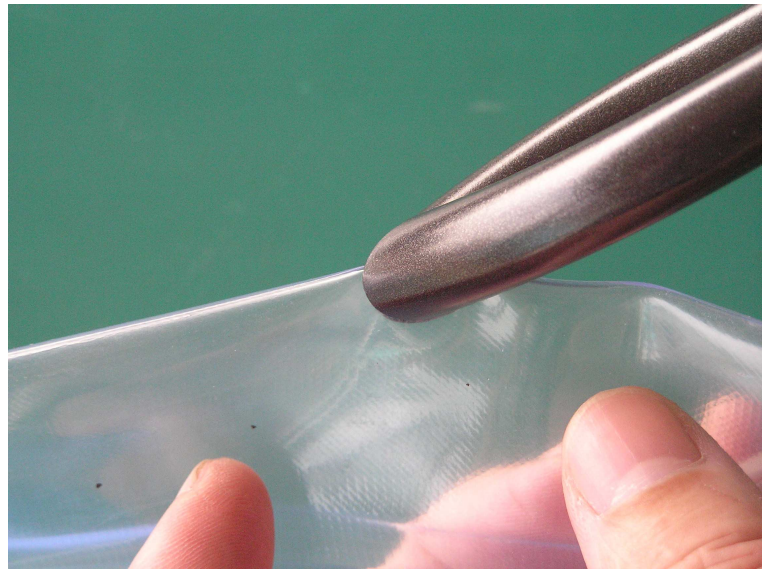

5. Finished.



6. **Unfold the tube only until it cooled.**

7. Unplug FOSS Pliers immediately once finished. Wait at least 8 minutes to cool before moving.

